

SLIPWAY TRAILER

HBT80VEL



Standard

- Manually operated control panel for all functions
- Hydraulic extendable V-shape drawbar for steering (SD)
- Hydraulic variable width
- Hydraulic variable height frame rear and front
- 10x Hydraulic dual pads 120x40cm
- 8 Pneumatic tires
- 2x Lifting feet for T-form cradles
- Straight crossbeam
- Heavy duty hydraulic hoses
- Standard length for both pressure- and return hoses 1,50m
- 2 Quick couplings tractor
- System configured for fixed displacement pump
- Coated RAL 1028 Yellow

Roodberg[®]

The Original



HBT80VEL

Dimensions in meters (approximativ)



A	overall length	19,81-25,48
B	drawbar length	8,53-14,20
C	wheelcenter to crossbeam	7,36
D	wheelcenter to frame end	3,52
E	pad distance	6,95
F	frame height	1,32-2,28
	total height on pads	1,56-3,10
G	pad height	0,24-0,82
H	frame width	1,49-2,84
I	lifting feet width	2,01-3,36
J	overall width	3,30-4,65
K	height on crossbeam	0,63

This trailer is equipped with the V-shape drawbar. As both legs are telescopic, the V can extend in length as well as steering the trailer. The V-shape gives more space to the bow of the boat, for more length.

HBT80VEL

Options

- Radio remote control of all hydraulic functions
- Fully galvanized frame + paint
- Denzo tape around hydraulic fittings
- Set of adjustable guiding arms
- Catamaran Crossbeams (width 10mtr)
- Quattro pads
- Nose pad on main crossbeam
- Stainless steel protection plates under pads
- Solid rubber tyres instead of air tyres
- Customized colour

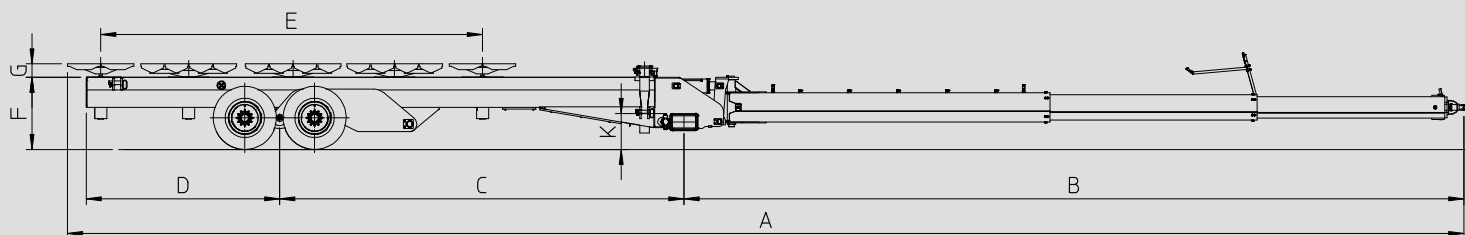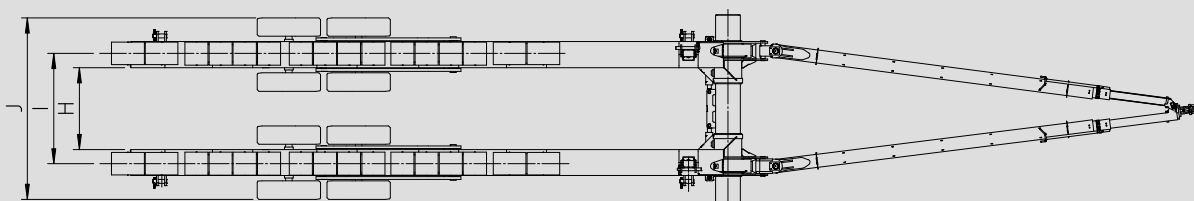

Specifications subject to change without notice. Pictures for references only.

Roodberg[®]

Phone: +31 513 52 1313
 info@roodberg.nl - www.roodberg.nl
 Terband - Heerenveen - The Netherlands
www.roodberg.com