

# SLIPWAY TRAILER

# SW5-10-15

## Choices

valve block of the trailer suited for open circuit pump (fix) of pulling vehicle

valve block of the trailer suited for closed circuit pump (LS) of pulling vehicle

## Standard

- open U-frame trailer on 4 wheels
- hydraulic variable height adjustment
- lifting capacity 5, 10 and 15 tons
- all lifting cylinders with safety valves
- manual operated valve block
- user manual according to CE
- hot dip galvanized drawbar
- hot dip galvanized frame
- hot dip galvanized structural parts of the pads
- galvanized and powder coated wheel rims
- galvanized wheel axles
- spray painted hydraulic cylinders
- hot dip galvanized mounting hardware
- wheel set pivot point with bronze bushings
- lubricated galvanized pins
- watertight hub construction
- heavy duty hydraulic hoses
- padded contact surface on long beams till halfway
- air filled tyres



**Roodberg**<sup>®</sup>

The Original




# SW5-10-15

## Options

- electric/hydraulic power pack
- tectylated hydraulic couplings
- hydraulic fittings protected by Denso anti corrosion tape
- stainless steel hydraulic fittings
- thermoplastic hydraulic hoses with kevlar reinforcement
- bio degradable hydraulic oil
- fully padded contact surface on long beams
- 2 manual adjustable pads
- solid tyres

Discription (Units: M)		SW5	SW10	SW15
A	Overall length	5,67	8,16	8,90
B	Drawbar length	1,66	2,35	3,08
C	Center to center wheelset-crossbeam	3,73	5,54	5,54
D	Wheelset center to frame end	0,28	0,28	0,28
E	Pad height	0,12-0,22	0,15-0,25	0,21-0,41
F	Frame height	0,48-0,99	0,56-1,46	0,85-1,72
G	Total height	0,60-1,21	0,71-1,71	0,85-1,96
H	Minimum height crossbeam	0,11	0,13	0,16
I	Pad distance	-	-	-
J	First pad center to crossbeam	3,89	5,68	5,69
K	Inside clear width wheels	0,69	0,78	0,84
L	Pad width center to center	1,25	1,50	1,70
M	Overall width	1,81	2,22	2,56
N	Crossbeam width	1,51	1,87	2,13
O	Lateral displacement pull eye	-	-	-
P	Wheels center to center	-	-	-
Q	Center to center wheelset-tandem	-	-	-
R	Inside clear width frame	1,07	1,43	2,38
S	Outside clear width frame	1,27	1,73	3,10
T	Length of padded contact surface	1,43	1,97	3,10

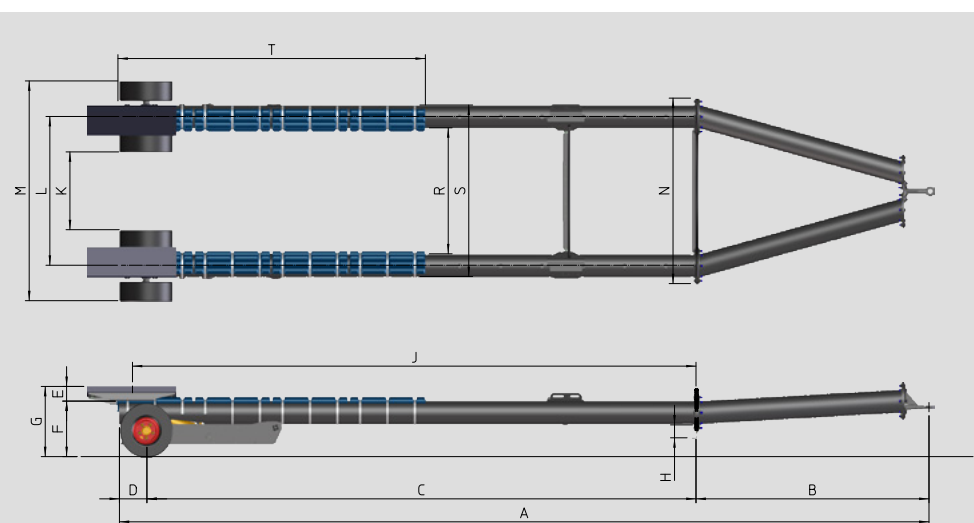

Specifications subject to change without notice and data are indicative only.

**Roodberg**<sup>®</sup>

+31 513 52 1313

info@roodberg.com - www.roodberg.com

Terband - Heerenveen - The Netherlands

[www.roodberg.com](http://www.roodberg.com)